

Specifications

Model	32DM66D	43DM66D	50DM66D/50DM66E	55DM66D
Backlight Type	DLED	DLED	DLED	DLED
Type	ADS	ADS	50DM66D - VA 50DM66E - IPS	ADS
Size	32"	43"	50"	55"
Resolution	1920 x 1080	3840 x 2160	3840 x 2160	3840 x 2160
Refresh rate	60Hz	60Hz	60Hz	60Hz
Color Depth	16.7M (8 Bits)	1.07G (8 Bits+FRC)	1.07G (8 Bits+FRC)	1.07G (8 Bits+FRC)
Brightness(Typ.)	500 nits	500 nits	500 nits	500 nits
Contrast Ratio(Typ.)	1200:1	1200:1	5000:1 / 1200:1	1200:1
Response Time(Typ.)	8ms	8ms	8ms	8ms
Viewing Angle(Min.)	178° /178°	178° /178°	178° /178°	178° /178°
Color Gamut(Typ.)	72% NTSC	72% NTSC	50DM66D - 90% DCI-P3 50DM66E - 72% NTSC	72% NTSC
Haze	25%	25%	25%	25%
Orientation	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait
Lifetime	up to 50,000 hrs	up to 50,000 hrs	up to 50,000 hrs	up to 50,000 hrs
Operation Hours	7Day x 24Hour	7Day x 24Hour	7Day x 24Hour	7Day x 24Hour

System

Operating System	Android 11	Android 11	Android 11	Android 11
Processor CPU	ARM Cortex-A55 Quad core	ARM Cortex-A55 Quad core	ARM Cortex-A55 Quad core	ARM Cortex-A55 Quad core
Processor GPU	Mali-G52	Mali-G52	Mali-G52	Mali-G52
Memory	3G DDR4	3G DDR4	50DM66D - 3G DDR4 50DM66E - 3GB DDR4	3G DDR4
Storage	32G EMMC	32G EMMC	50DM66D - 32G EMMC 50DM66E - 32GB EMMC	32G EMMC
Language	Simplified Chinese, English, French, German, Polish, Spanish, Russian, Italian, Finnish, Norwegian, Swedish, Hebrew, Arabic, Thai, Malay, Indonesian			

Connectivity

WI-FI	2.4/5.0GHz dual,802.11a/b/g/n/ac	2.4/5.0GHz dual,802.11a/b/g/n/ac	2.4/5.0GHz dual,802.11a/b/g/n/ac	2.4/5.0GHz dual,802.11a/b/g/n/ac
Bluetooth	BT5.1	BT5.1	BT5.1	BT5.1
Input	HDMI(2.0) x 2 DP(1.2a) x 1 USB2.0(A) x 1 USB3.0(A) x 1 RS232(RJ45) x 1 LAN(RJ45) x 1	HDMI(2.0) x 2 DP(1.2a) x 1 USB2.0(A) x 1 USB3.0(A) x 1 RS232(RJ45) x 1 LAN(RJ45) x 1	HDMI(2.0) x 2 DP(1.2a) x 1 USB2.0(A) x 1 USB3.0(A) x 1 RS232(RJ45) x 1 LAN(RJ45) x 1	HDMI(2.0) x 2 DP(1.2a) x 1 USB2.0(A) x 1 USB3.0(A) x 1 RS232(RJ45) x 1 LAN(RJ45) x 1
Output	HDMI x 1 Audio(3.5mm) x 1 RS232(RJ45) x 1	HDMI x 1 Audio(3.5mm) x 1 RS232(RJ45) x 1	HDMI(2.0) x 1 Audio(3.5mm) x 1 RS232(RJ45) x 1	HDMI x 1 Audio(3.5mm) x 1 RS232(RJ45) x 1

Physical

Bezel Color	Black	Black	Black	Black
Set Dimension (W×H×D)	726 x 420.6 x 61.5mm 25.6 x 16.6 x 2.4inch	970.4 x 557.5 x 62.8mm 38.20 x 21.9 x 2.5inch	1124.1 x 644.2 x 62.5mm 44.26 x 25.36 x 2.46inch	1239.7 x 710.2 x 63.3mm 48.8 x 28 x 2.5inch
Bezel width(T/L/R/B)	10.1mm(T/L/R), 10.3mm(B)	10.1mm(T/L/R), 10.3mm(B)	10.4mm(T/L/R), 11.1mm(B)	10.1mm(T/L/R), 10.6mm(B)
Net Weight	4.6kg / 10.1lbs	8.5kg / 18.7lbs	11kg / 24.3lbs	13.9kg / 30.6lbs
Packing Dimension (W×H×D)	820 x 512 x 126mm 32.3 x 20.2 x 5inch	1092 x 663 x 145mm 43 x 26.1 x 5.7inch	1251 x 777 x 154mm 49.2 x 30.6 x 6.1inch	1387 x 838 x 159mm 54.6 x 33 x 6.3inch
Gross Weight	6.5kg / 14.33lbs	12.5kg / 27.56lbs	16.2kg / 35.7lbs	19.5kg / 43lbs
VESA Mount	200mm x 200mm	300mm x 300mm	300mm x 300mm	300mm x 300mm

* Product specifications may vary per region, and specifications are subject to change. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.

Learn More: www.hisense-b2b.com | Contact Us: sales@hisense-b2b.com

Linkedin: @Hisense Commercial Display | @Hisense B2B Europe | @Hisense B2B USA | @Hisense B2B Australia



Specifications

Model	65DM66D	75DM66D	86DM66D	100DM66E
Backlight Type	DLED	DLED	DLED	DLED
Type	ADS	ADS	ADS	VA
Size	65"	75"	86"	100"
Resolution	3840 x 2160	3840 x 2160	3840 x 2160	3840 x 2160
Refresh rate	60Hz	60Hz	60Hz	60Hz
Color Depth	1.07G (8 Bits+FRC)	1.07G (8 Bits+FRC)	1.07G (8 Bits+FRC)	1.07B(10bit)
Brightness(Typ.)	500 nits	500 nits	500 nits	500 nits
Contrast Ratio(Typ.)	1200:1	1200:1	1200:1	5000:1
Response Time(Typ.)	8ms	8ms	8ms	8ms
Viewing Angle(Min.)	178° /178°	178° /178°	178° /178°	178° /178°
Color Gamut(Typ.)	72% NTSC	72% NTSC	72% NTSC	90% DCI-P3
Haze	25%	25%	25%	25%
Orientation	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait
Lifetime	up to 50,000 hrs	up to 50,000 hrs	up to 50,000 hrs	up to 50,000 hrs
Operation Hours	7Day x 24Hour	7Day x 24Hour	7Day x 24Hour	7Day x 24Hour

System

Operating System	Android 11	Android 11	Android 11	Android 11
Processor CPU	ARM Cortex-A55 Quad core	ARM Cortex-A55 Quad core	ARM Cortex-A55 Quad core	ARM Cortex-A55 Quad core
Processor GPU	Mali-G52	Mali-G52	Mali-G52	Mali-G52
Memory	3G DDR4	3G DDR4	3G DDR4	3G DDR4
Storage	32G EMMC	32G EMMC	32G EMMC	32G EMMC
Language	Simplified Chinese, English, French, German, Polish, Spanish, Russian, Italian, Finnish, Norwegian, Swedish, Hebrew, Arabic, Thai, Malay, Indonesian			

Connectivity

WI-FI	2.4/5.0GHz dual,802.11a/b/g/n/ac	2.4/5.0GHz dual,802.11a/b/g/n/ac	2.4/5.0GHz dual,802.11a/b/g/n/ac	2.4/5.0GHz dual,802.11a/b/g/n/ac
Bluetooth	BT5.1	BT5.1	BT5.1	BT5.1
Input	HDMI(2.0) x 2 DP(1.2a) x 1 USB2.0(A) x 1 USB3.0(A) x 1 RS232(RJ45) x 1 LAN(RJ45) x 1	HDMI(2.0) x 2 DP(1.2a) x 1 USB2.0(A) x 1 USB3.0(A) x 1 RS232(RJ45) x 1 LAN(RJ45) x 1	HDMI(2.0) x 2 DP(1.2a) x 1 USB2.0(A) x 1 USB3.0(A) x 1 RS232(RJ45) x 1 LAN(RJ45) x 1	HDMI(2.0) x 2 DP(1.2a) x 1 USB2.0(A) x 1 USB3.0(A) x 1 RS232(RJ45) x 1 LAN(RJ45) x 1
Output	HDMI x 1 Audio(3.5mm) x 1 RS232(RJ45) x 1	HDMI x 1 Audio(3.5mm) x 1 RS232(RJ45) x 1	HDMI(2.0) x 1 Audio(3.5mm) x 1 RS232(RJ45) x 1	HDMI x 1 Audio(3.5mm) x 1

Physical

Bezel Color	Black	Black	Black	Black
Set Dimension (W×H×D)	1458.9 x 832.8 x 63.7mm 57.4 x 32.8 x 2.5inch	1675.3 x 955.1 x 63.7mm 66 x 37.6 x 2.5inch	1926.6 x 1095.5 x 64.2mm 75.9 x 43.1 x 2.5inch	2234.6 x 1285.6 x 86.5mm 88 x 50.6 x 3.4inch
Bezel width(T/L/R/B)	10.4mm(T/L/R), 10.9mm(B)	10.3mm(T/L/R), 10.8mm(B)	10.3mm(T/L/R), 10.8mm(B)	13.2mm(T/L/R), 19mm(B)
Net Weight	21.5kg / 47.4lbs	29kg / 63.9lbs	38.2kg / 84.2lbs	58.7kg / 129.41lbs
Packing Dimension (W×H×D)	1629 x 997 x 160mm 64.1 x 39.0 x 6.3inch	1850 x 1150 x 211mm 72.8 x 45.3 x 8.3inch	2117 x 1298 x 269mm 83.3 x 51.1 x 10.6inch	2402×1514×297mm 94.57×59.61×11.69 inch
Gross Weight	30kg / 66.1lbs	41.6kg / 91.7lbs	59.5kg / 131.2lbs	76.2kg / 168lbs
VESA Mount	400mm x 400mm	600mm x 400mm	600mm x 400mm	600mm x 600mm (Landscape) 600mm x 1000mm (Portrait)

* Product specifications may vary per region, and specifications are subject to change. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.

Learn More: www.hisense-b2b.com | Contact Us: sales@hisense-b2b.com

Linkedin: @Hisense Commercial Display | @Hisense B2B Europe | @Hisense B2B USA | @Hisense B2B Australia



Power

Model	32DM66D	43DM66D	50DM66D/50DM66E	55DM66D
Power Supply	AC 100~240V (50/60Hz)	AC 100~240V (50/60Hz)	AC 100~240V (50/60Hz)	AC 100~240V (50/60Hz)
Power Consumption (Typ.)	52W	80W	100W	115W
Power Consumption (Max.)	60W	120W	150W	190W
Standby Consumption	<0.5W (Standby Mode)	<0.5W (Standby Mode)	<0.5W (Standby Mode)	<0.5W (Standby Mode)

Speaker

Built in speaker	10W x 2	10W x 2	10W x 2	10W x 2
------------------	---------	---------	---------	---------

Environment

Operating Temperature	0°~40°C	0°~40°C	0°~40°C	0°~40°C
Operating Humidity	10%~80% Non-Condensing	10%~80% Non-Condensing	10%~80% Non-Condensing	10%~80% Non-Condensing

What's in the box

Standard	Quick Setup Guide
	Warranty Card
	Power Cord
	Remote Control
	Battery (AAA) x 2
	RS232 Converter Cable

Certification

Standard Certiycation	CCC/CB/CE/FCC/ETUVus/UKCA/CEC/ERP
Safety	62368-1
Enviroment	Energy Star 8.0
IP Rating	IP5X (Excluding 100")



Power

Model	65DM66D	75DM66D	86DM66D	100DM66E
Power Supply	AC 100~240V (50/60Hz)	AC 100~240V (50/60Hz)	AC 100~240V (50/60Hz)	AC 100~240V (50/60Hz)
Power Consumption (Typ.)	145W	175W	200W	240W
Power Consumption (Max.)	210W	265W	325W	450W
Standby Consumption	<0.5W (Standby Mode)	<0.5W (Standby Mode)	<0.5W (Standby Mode)	<0.5W (Standby Mode)

Speaker

Built in speaker	10W x 2	10W x 2	10W x 2	15W x 2
------------------	---------	---------	---------	---------


Environment

Operating Temperature	0°~40°C	0°~40°C	0°~40°C	0°~40°C
Operating Humidity	10%~80% Non-Condensing	10%~80% Non-Condensing	10%~80% Non-Condensing	10%~80% Non-Condensing




Dimensions


32" 726 x 420.6 x 61.5mm / 25.6 x 16.6 x 2.4inch
4.6kg / 10.1lbs

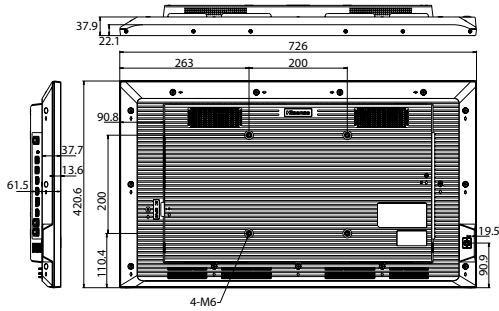


43" 970.4 x 557.5 x 62.8mm / 38.20 x 21.9 x 2.5inch
8.5kg / 18.7lbs

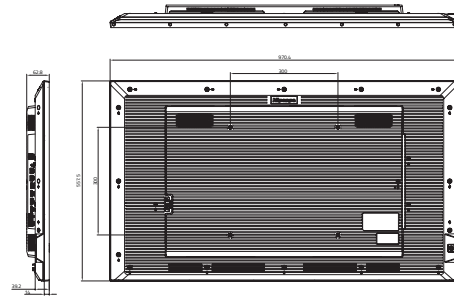

50" 1124.1 x 644.3 x 62.5mm / 44.26 x 25.36 x 2.46inch
11kg / 24.3lbs

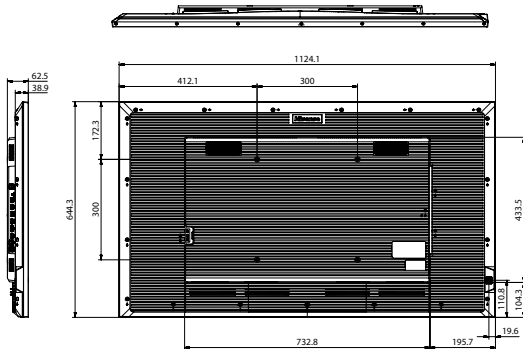


55" 1239.7 x 710.2 x 63.3mm / 48.8 x 28 x 2.5inch
13.9kg / 30.6lbs

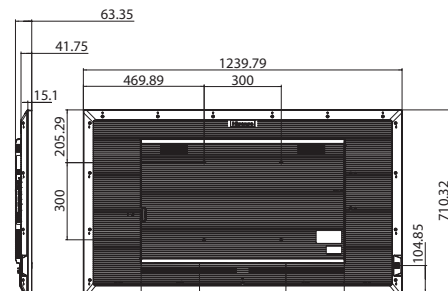

65" 1458.9 x 832.8 x 63.7mm / 57.4 x 32.8 x 2.5inch
21.5kg / 47.4lbs




75" 1675.3 x 955.1 x 63.7mm / 66 x 37.6 x 2.5inch
29kg / 63.9lbs

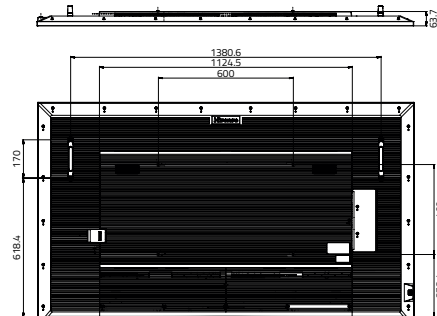

59.6kg / 131.4lbs

86" 1926.6 x 1095.5 x 64.2mm / 75.9 x 43.1 x 2.5inch
38.2kg / 84.2lbs

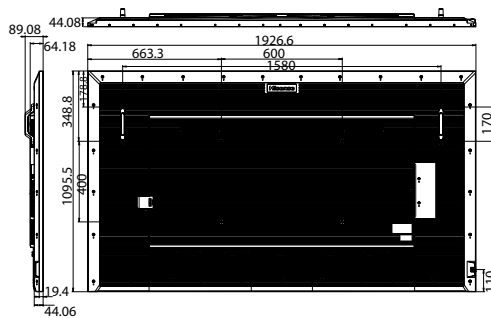

100" 2234.6 x 1285.6 x 86.5mm / 88 x 50.6 x 3.4inch
59.6kg / 131.4lbs

